


# ALL PROFESSIONAL GRADE

- AIR TOOLS
- BELT DRIVE AIR COMPRESSORS
- SCREW AIR COMPRESSORS
- SILENT OILFREE SCROLL AIR COMPRESSORS
- DIRECT DRIVEN AIR COMPRESSORS
- ACCESSORIES

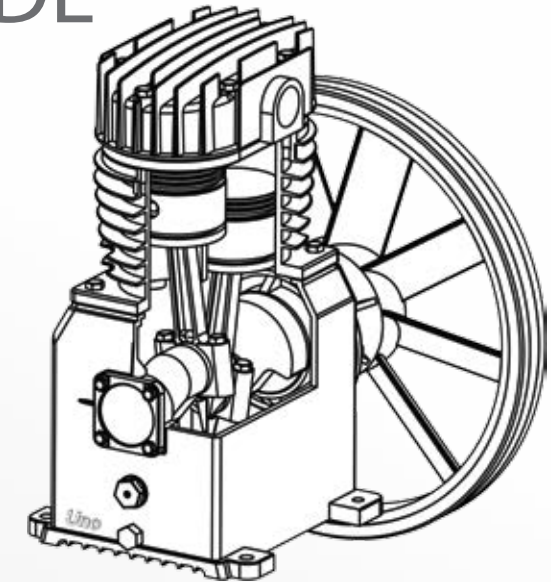

# Unoair®

THE COMPRESSED AIR SYSTEM THAT A PROFESSIONAL DESERVES

SINCE 1978

**Unoair®**

UNO RESOURCING INC.

✉ [marketing@unoair.com.tw](mailto:marketing@unoair.com.tw) / [marketing@unoair.co.jp](mailto:marketing@unoair.co.jp)



🏠 No. 27 Beihuan Road, Wuqi District, Taichung City, 435059, Taiwan

🌐 [www.unoair.com.tw](http://www.unoair.com.tw) / [www.unoair.co.jp](http://www.unoair.co.jp)

■ Unoair Skype: [marketing@unoaircompressor.com](https://www.skype.com/contact/unoaircompressor.com)

## THE UNO GROUP

UNO RESOURCING INC. (TAIWAN)  
UNO KUNSHAN INDUSTRIAL INC. (CHINA)  
SHANGHAI PUMA M.& E. INDUSTRIAL INC. (CHINA)  
DAFENG ABUNDANT INDUSTRIAL INC. (CHINA)  
KEISEI MACHINE TOOLS K.K. (JAPAN)

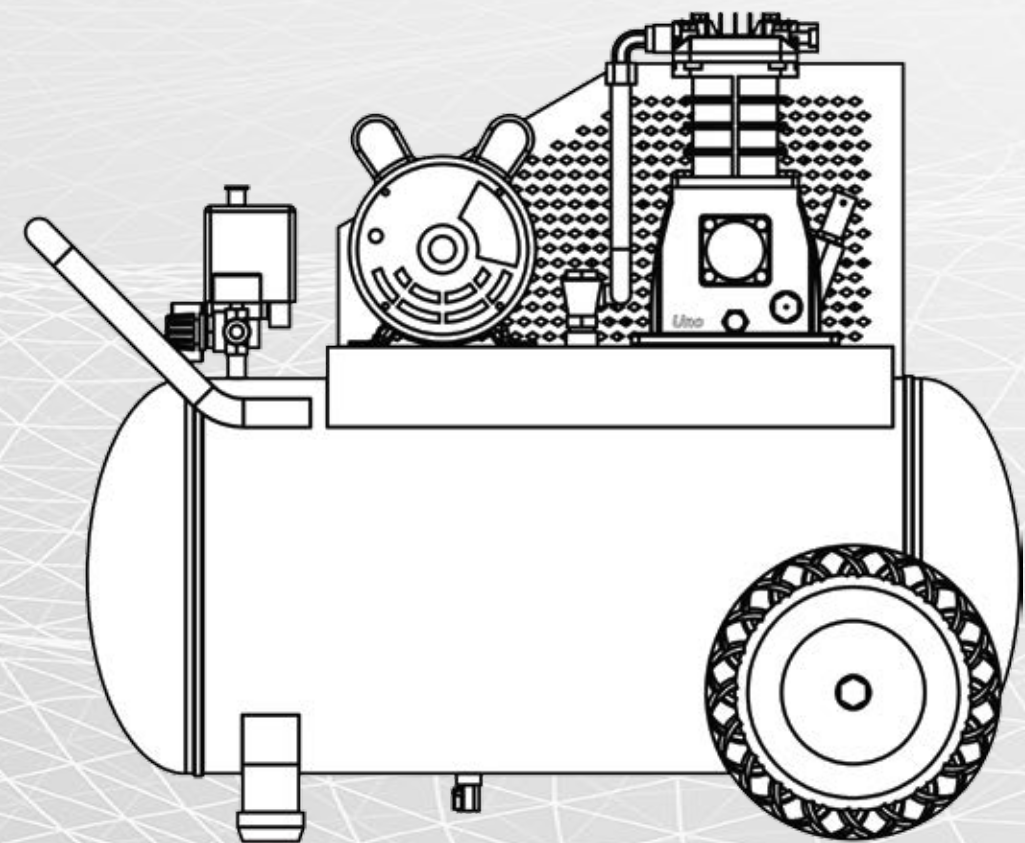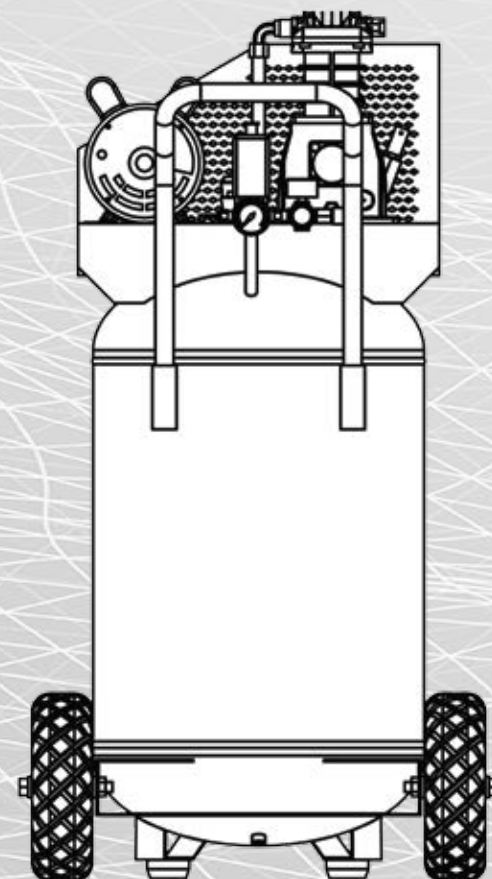



- Permanent Magnet Motor
- Excellent Lubricant Management Control
- Low Noise, Durable, and High Efficiency
- Simple Operation

High Efficiency IE4 Motor



AB-150AM



PERMANENT MAGNET MOTOR



AB-1000AM



AB-150AM



AB-500AM



AB-500AM

| Model         | Power |    | Working Pressure<br>(0.8Mpa) | Tank Volume | Noise Level | Dimensions |      |      | Air Outlet Size | Weight | Air Tank | Air Dryer |
|---------------|-------|----|------------------------------|-------------|-------------|------------|------|------|-----------------|--------|----------|-----------|
|               | HP    | kW | FAD (m3/min)                 | L           | dB (A) ±2   | mm         | mm   | mm   | inch            | kg     |          |           |
| AB-150AM      | 15    | 11 | 1.53                         | \           | 68          | 1050       | 720  | 1010 | 1"              | 480    |          |           |
| AB-200AM      | 20    | 15 | 2.03                         | \           | 68          | 1050       | 720  | 1010 | 1"              | 480    |          |           |
| AB-300AM      | 30    | 22 | 3.56                         | \           | 72          | 1120       | 820  | 1150 | 1-1/4"          | 550    |          |           |
| AB-500AM      | 50    | 37 | 6.26                         | \           | 72          | 1280       | 970  | 1295 | 1-1/2"          | 700    |          |           |
| AB-750AM      | 75    | 55 | 10.1                         | \           | 76          | 1820       | 1140 | 1580 | 2"              | 1000   |          |           |
| AB-1000AM     | 100   | 75 | 12.7                         | \           | 78          | 1460       | 1140 | 1580 | 2"              | 1100   |          |           |
| AB-150AM-T    | 15    | 11 | 1.53                         | 300         | 68          | 1460       | 720  | 1620 | 1"              | 630    | ✓        |           |
| AB-200AM-T    | 20    | 15 | 2.03                         | 300         | 68          | 1460       | 720  | 1620 | 1"              | 630    | ✓        |           |
| AB-300AM-T    | 30    | 22 | 3.56                         | 400         | 72          | 1600       | 820  | 1900 | 1-1/4"          | 720    | ✓        |           |
| AB-150AM-T-AD | 15    | 11 | 1.53                         | 400         | 68          | 1750       | 850  | 1640 | 1"              | 810    | ✓        | ✓         |
| AB-200AM-T-AD | 20    | 15 | 2.03                         | 400         | 68          | 1750       | 850  | 1640 | 1"              | 810    | ✓        | ✓         |
| AB-300AM-T-AD | 30    | 22 | 3.56                         | 600         | 72          | 1840       | 900  | 1880 | 1-1/4"          | 900    | ✓        | ✓         |

SL

Silent Oil Free Scroll Air Compressor

- 100% Oil Free, Ideal For Food Processing and Applications that require Oil Free Air
- Highly Efficient and Silent
- Simple Maintenance
- No Hazardous Exhaust
- Compact Size

High Efficiency IE4 Motor



Scroll Compression Diagram



SL-30



SL-30



SL-75T2-AD



SL-50



SL-50

| Model      | Power |            | Max Working Pressure | FAD   | Tank Volume | Noise  | Dimensions |     |      | Air Outlet Size | Weight | Air Tank | Air Dryer |
|------------|-------|------------|----------------------|-------|-------------|--------|------------|-----|------|-----------------|--------|----------|-----------|
|            | HP    | kW         | bar                  | L/min | L           | dB (A) | mm         | mm  | mm   | inch            | kg     |          |           |
| SL-30      | 3     | 2.2(2.2*1) | 8~10                 | 240   | /           | 58±2   | 640        | 660 | 890  | 1/2"            | 200    |          |           |
| SL-50      | 5     | 3.7(3.7*1) | 8~10                 | 420   | /           | 58±2   | 640        | 660 | 890  | 1/2"            | 220    |          |           |
| SL-75      | 7.5   | 5.5(5.5*1) | 8~10                 | 620   | /           | 58±2   | 640        | 660 | 890  | 3/4"            | 240    |          |           |
| SL-30T     | 3     | 2.2(2.2*1) | 8~10                 | 240   | 24          | 58±2   | 960        | 660 | 1360 | 1/2"            | 210    | ✓        |           |
| SL-50T     | 5     | 3.7(3.7*1) | 8~10                 | 420   | 24          | 58±2   | 960        | 660 | 1360 | 1/2"            | 230    | ✓        |           |
| SL-75T     | 7.5   | 5.5(5.5*1) | 8~10                 | 620   | 24          | 58±2   | 960        | 660 | 1360 | 3/4"            | 250    | ✓        |           |
| SL-75T2    | 7.5   | 5.5(5.5*1) | 8~10                 | 620   | 200         | 58±2   | 1340       | 650 | 1530 | 3/4"            | 290    | ✓        |           |
| SL-30T-AD  | 3     | 2.2(2.2*1) | 8~10                 | 240   | 24          | 58±2   | 960        | 660 | 1360 | 1/2"            | 260    | ✓        | ✓         |
| SL-50T-AD  | 5     | 3.7(3.7*1) | 8~10                 | 420   | 24          | 58±2   | 960        | 660 | 1360 | 1/2"            | 350    | ✓        | ✓         |
| SL-75T-AD  | 7.5   | 5.5(5.5*1) | 8~10                 | 620   | 24          | 58±2   | 960        | 660 | 1360 | 3/4"            | 320    | ✓        | ✓         |
| SL-75T2-AD | 7.5   | 5.5(5.5*1) | 8~10                 | 620   | 200         | 58±2   | 1340       | 650 | 1530 | 3/4"            | 370    | ✓        | ✓         |